

EQUIVIS AF

High performance, ash-free hydraulic oil for use in low temperature applications



L'EQUIVIS AF is an hydraulic fluid formulated with high quality oils and ash-free addivation.


Particularly well-adapted for environments subject to a wide variety of temperatures and with a risk of contamination with water.



CUSTOMER BENEFITS

- > High reliability
- > Long lifetime
- > Hydrolytic stability
- > Adapted for wide temperature range

OPTIMAL PERFORMANCE

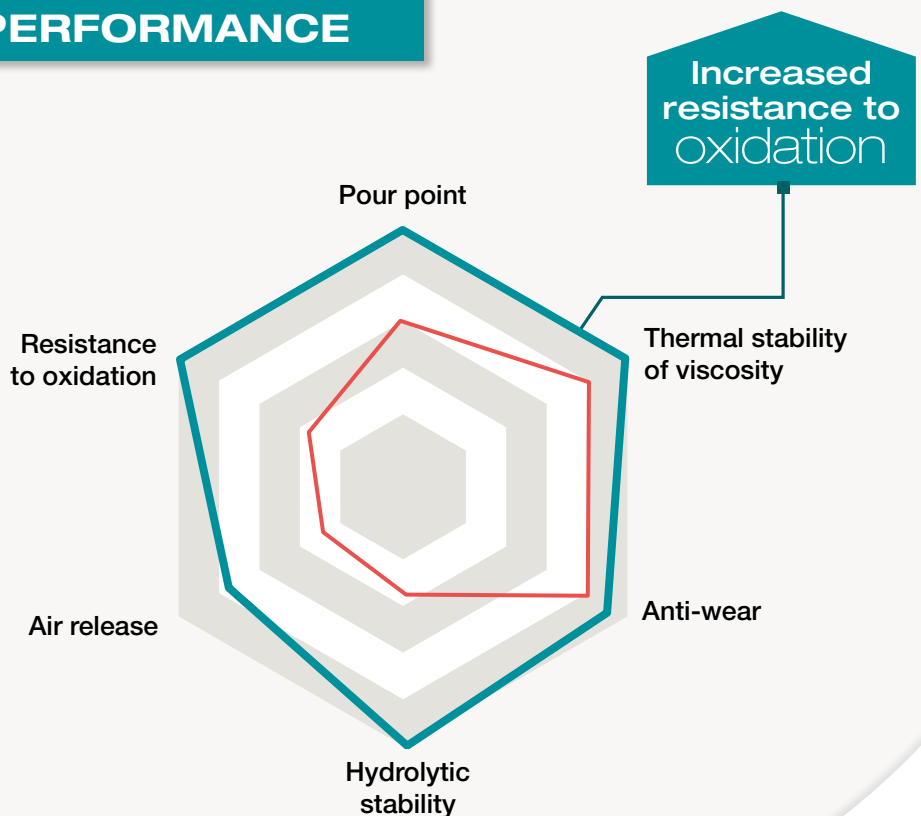

◆ EQUIVIS AF
◆ Standard HV hydraulic oil




TOTAL



EXCELLENT LIFETIME

> Extended oil drain interval

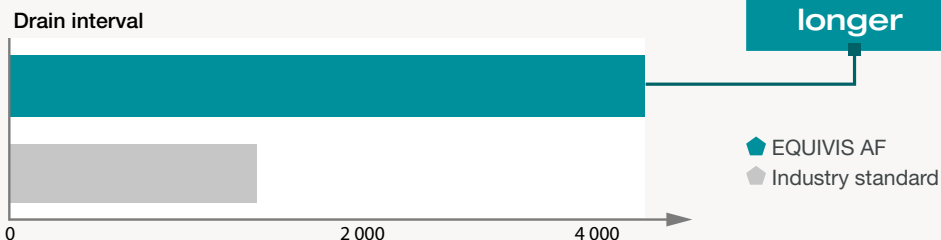

EQUIVIS AF is specially designed to offer both increased resistance to oxidation and an exceptional lifetime. Ash-free additivation makes the oil particularly well-adapted for use in environments with heavy water pollution by preventing deposits formation.

✓ STANDARDS:


- ISO 6743-4 HV
- DIN 51524-3 HVLP

“TOTAL Lubricants first developed **EQUIVIS AF 32** to meet our requirements for ground vehicle. The product meets our specifications. It has been approved and we are satisfied with its performance.”

French Army
Fuel Service (SEA)

EXCELLENT HYDROLYTIC RESISTANCE


> Hydrolytic stability (48 hours at 93°C)

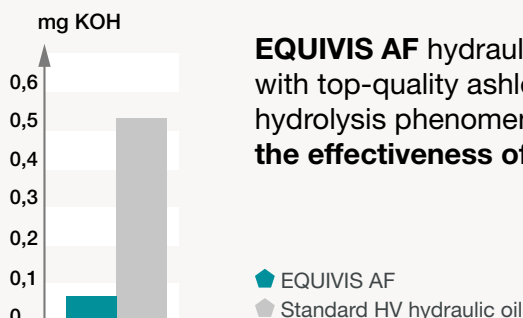

EQUIVIS AF hydraulic oil is developed with top-quality ashless additives minimizing hydrolysis phenomenon. This **preserves the effectiveness of additives over time.**

THERMAL STABILITY OF VISCOSITY

> Viscosity index

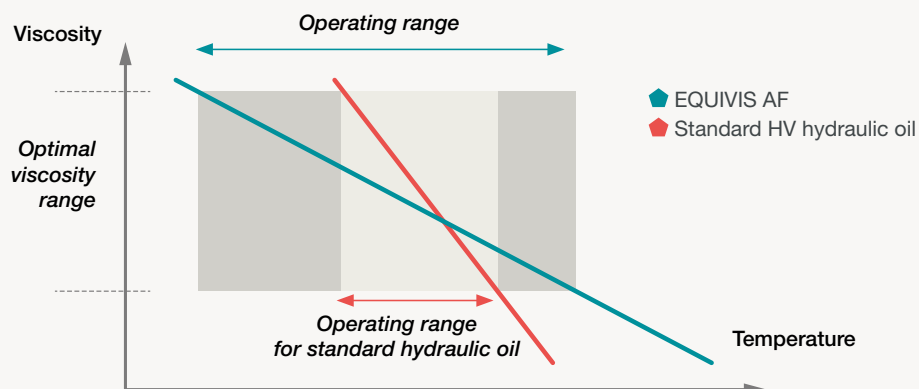

With its very high viscosity index, **EQUIVIS AF** hydraulic oil is perfectly adapted for all applications subject to wide temperature variations.